

TVOC 2

FIXED VOC MONITOR



FIXED PID MONITOR FOR VOLATILE
ORGANIC COMPOUNDS.

ionscience.com

Unrivalled Gas Detect**ion**.





CONTINUOUS DETECTION OF VOLATILE ORGANIC COMPOUNDS (VOCs) WITH MULTIPLE RANGE FROM JUST ONE INSTRUMENT.

Best available photoionisation (PID) detection


- PID independently verified as best performing on the market
- Range: 0 to 10, 0 to 100 or 0 to 1000 ppm from just one instrument
- In-built humidity resistance with no need to compensate
- Anti-contamination design for extended field operation
- Reliable diffusive monitoring - no pump required
- An optional sensor cap allows a pipe connection

Safety

- Accurate results over all environmental conditions
- Rugged and robust design withstands harsh environments
- Large LCD display for clear readings
- ATEX and IECEx approved

Ease of use

- Simple to use - minimal training required
- Easy access PID sensor for fast, simple servicing
- Simple calibration procedure
- Easily integrated into a control system

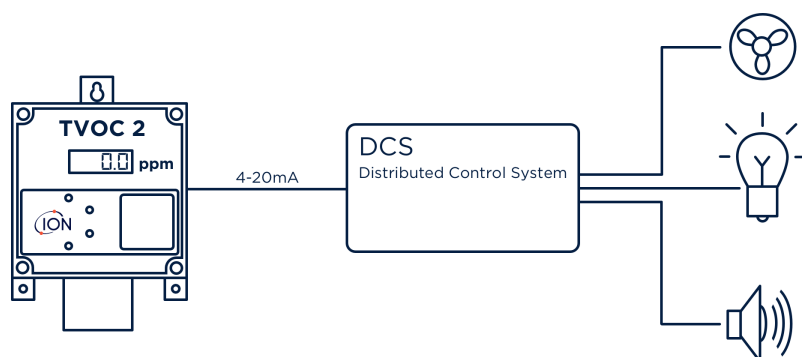

Low cost operation

- Inexpensive consumables and parts
- 2 year warranty when instrument is registered online

Unrivalled Gas Detection.

ionscience.com



MiniPID 2 sensor



TVOC 2 is a fixed photoionisation detector (PID) for the continuous measurement of total volatile organic compounds (VOCs). TVOC 2 can accurately measure three detection ranges.

TVOC 2 continually measures and updates the output every second.

TVOC 2 utilises a diffusive sample technique resulting in less contamination issues compared to pumped systems, reducing lamp cleaning and servicing requirements. The 4-20 mA analogue output enables TVOC to be integrated into a DCS control system to give warning or control of high VOC levels in the working environment.

ATEX approvals enable a 3 wire TVOC system to be used in Zone 2 hazardous areas, without safety barriers. ATEX and IECEx approvals allow TVOC to be used in Zone 1 hazardous areas, with safety barriers.

Simple to install, service and calibrate, TVOC 2 requires no hot work permit and the PID sensor is accessible and changeable in a matter of seconds.

Extend your instrument warranty

Your TVOC 2 instrument warranty may be extended by simply registering your product on the Ion Science website within one month of purchase. Visit www.ionscience.com/instrument-registration to take advantage of this offer.

Applications include:

- Manufacturing
- Processing
- Offshore
- Refineries & petrochemical
- Chemical
- Waste water treatment
- Pulp & paper
- Pharmaceutical
- Indoor air quality
- Solvent recovery systems
- Industrial painting & coating



Accessories

TVOC 2 is supplied with an exclusive range of accessories. Visit www.ionscience.com/tvoc for more info.



Technical specifications

Approvals

-  II 2G Ex ia IIC T4 Gb
($-20^{\circ}\text{C} \leq T_a \leq +50^{\circ}\text{C}$)
-  II 3G Ex nA IIC T4
($-40^{\circ}\text{C} \leq T_a \leq +50^{\circ}\text{C}$)
- Baseefa05ATEX0277X
- IECEx BAS 06.0057X

Ingress protection rating

- Designed to IP65
- Dependent on cable glands fitted sensor to IP53

Power

- 5-28 VDC Max 130 mA

Output

- 4-20 mA requires a 8-35 VDC power supply
- For IS requirements 8-30 VDC power supply

Range

- 0 to 10 ppm, 0 to 100 ppm, 0 to 1000 ppm (user selectable)

Sampling

- Diffusion (can be pumped if required using an adaptor)

Display

- 7 segment, 4 digit LCD, 4 color LEDs

Response

- Sensor - T90 < 5 sec

Accuracy

- 0 to 100 ppm: $\pm 5\%$ at calibration point.
100 to 1000 ppm: $\pm 10\%$ at calibration points.

Calibration

- Accessed via magnetic switch
- 100 ppm Isobutylene via calibration kit accessory

Temperature

- Operating: -20°C to 50°C (-4°C - 122°F)
- Humidity: 0-95% RH (non- condensing)

Weight & dimensions

- Instrument: 1.4 kg (3.1 lb)
Packed: 1.6 kg (3.5 lb)
- Dimensions: 188 x 126 x 78 mm (7.4 x 4.9 x 3")

4-20 mA alarm levels

- Selectable 2 mA & 3.5 mA options

TVOC 2 V1.0 This publication is not intended to form the basis of a contract and specifications can change without notice.

All specifications quoted are at calibration point and under the same ambient conditions. Specifications are based on isobutylene calibration at 20°C and 1000 mBar.

* The Fence Electrode technology referred to in this document is produced by Ion Science Ltd, and protected by patents. U.S. Patent No. 7,046,012, EP 1474681, other patents pending. TVOC 2 is a registered trademark of Ion Science Ltd.

Distributed by:

ION Science Ltd

The Hive, Butts Lane,
Fowlmere, Cambridgeshire,
SG8 7SL, UK

T +44 (0)1763 208503

E info@ionscience.com